


PULSAFEEDER®

MicroVision^{EX} is a microprocessor-based conductivity, pH, and ORP controller, with the features and functions you need for accurate monitoring and control of cooling tower water that won't break your budget!

Features

- Toroidal conductivity sensor.
- PTSA probe available.
- One-point calibration.
- Large easy to read color display.
- Lockable front cover.
- Multiple level security codes.
- Up to 10 digital inputs.
- Optional 4-20 mA analog outputs and inputs.
- Dry contact alarm output.
- Battery backup.
- USB data logging is standard:
 - Up to 2 years of data logging.
 - Upload/Download program settings.
 - Upgrades to the Operating System.
- Optional PULSAlink cloud based communications.
- eServiceReport compatible.

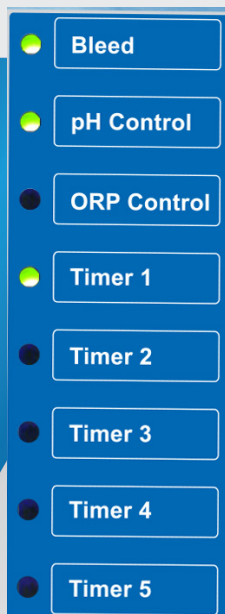

Bleed

- Solenoid valves, or motorized ball valves

pH and ORP Control

- Pumps, solenoid valves, or motorized ball valves

Up to 6 Selectable Timer Relays

- Limit timer
- Percent timer
- % post bleed with limit timer
- Water meter pulse timer
- Biocide control timer, with pre-bleed, lockout, and conductivity minimum
- 4-20mA input, pH, or ORP set point control
- Alarm output

Operating Benefits

- Easy installation.
- Easy programming based on MicroVision simplicity.
- Toroidal conductivity probe.
 - No need to recalibrate conductivity probe.
 - Reduced potential for fouling.
- Two year warranty.
- Wide control range: 0 – 9,999 $\mu\text{S}/\text{cm}$.
- Compact size saves space and reduces freight cost.



Aftermarket

- Solenoids
- Motorized Ball Valves
- Water Meters
- Corrosion Coupon Racks
- Metering Pumps (PULSAtron, XP Series)



MicroVision^{EX}
Cooling Tower Controller

Model	Control Parameters	Relays	Timers	Probes	USB	4-20mA Inputs	4-20mA Outputs	Digital Inputs	PULSAlink models with "-X"	PULSAlink models with "-E"
MVECXXX	Conductivity	4	3	1	✓	0 to 1	0 to 1	5	NA	Included
MVEC5XX	Conductivity	5	4	1	✓	0 to 1	0 to 1	5	NA	Included
MVECPXX	Conductivity and pH	8	6	2	✓	0 to 2	0 to 4	10	Optional	Included
MVECOXX	Conductivity and ORP	8	6	2	✓	0 to 2	0 to 4	10	Optional	Included
MVECPOX	Conductivity, pH and ORP	8	5	3	✓	0 to 2	0 to 4	10	Optional	Included
MVECPOM	Conductivity, Make-Up, pH and ORP	8	5	4	✓	0 to 2	0 to 4	10	Optional	Included

Engineering Data Digital Inputs

Digital Inputs	Input 1	Inputs 2 to 4	Input 5	Inputs 6 & 7	Inputs 8, 9 and 10
Function	Flow Switch	Drum Level	Water Meter	Water Meter	Water Meter
Dry Contact	✓	✓	✓	✓	✓
Hall Effect			✓		✓

Engineering Data Controller

Enclosure:	IP65
Temperature Range:	122°F / 50°C
Power Supply:	100 VAC – 240 VAC / 50/60Hz / 8A
Control Output:	8 Amps max (3 Amps / Relay)
Display:	Multicolor graphical LCD
Set Point Range:	0 - 9,999 µS/cm 0 – 14 pH -2000 - + 2000mV
Set Point Types:	Rising or Falling
Languages:	English

Engineering Data Sensor

Maximum Temperature:	122°F / 50°C
Flow Switch Activate Flow Rate:	Approx. 1 GPM / 3.78 LPM
Conductivity Temp. Comp. Range:	32°F - 122°F / 0°C - 50°C
Maximum Pressure:	125 PSI (8.6 BAR)
Sensor Type:	Toroidal Conductivity Standard industrial pH and ORP sensors

MicroVision EX Panel Systems



Pulsafeeder's MicroVision Systems are designed to provide complete and easy to install solutions for cooling tower applications.

- Rugged custom fabricated assemblies.
- Turn-key simplicity.
- Industrial-grade durability.
- Mounting locations for up to three pumps.
- Factory assembled and hydrostatically tested.

Dimensions

