




# Pumps 2000

AMERICA

*Designed to Make a Difference*

## Dual Diaphragm Pump

### 1" / 25mm Ball Valve

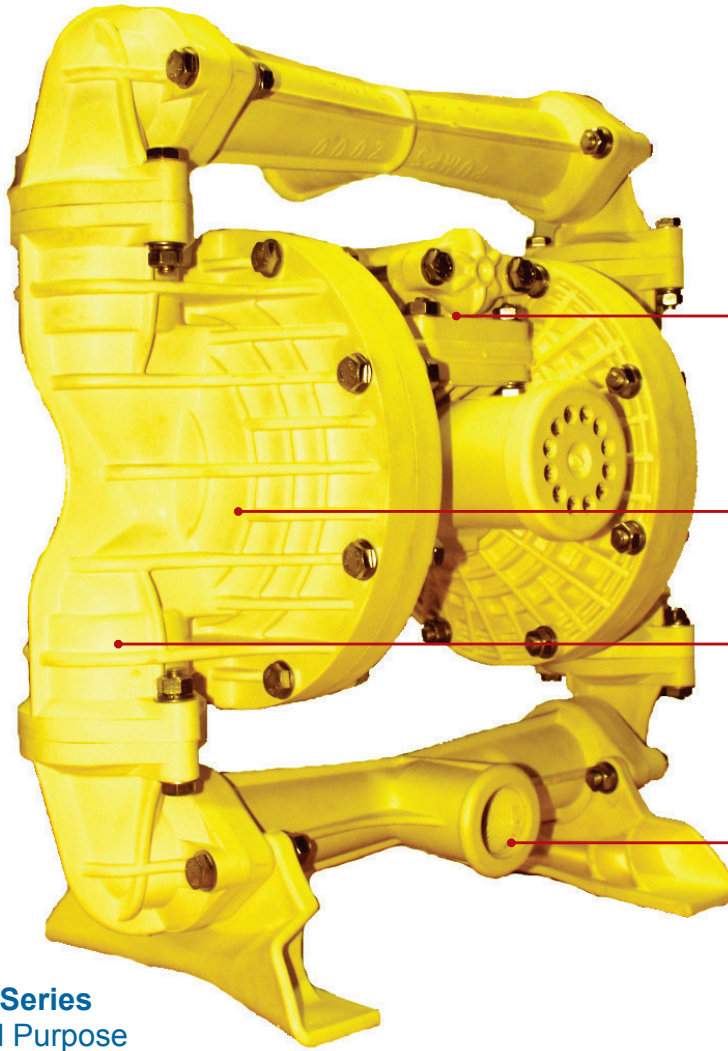


**Yellow Series**  
General Purpose  
Nylon Body

Patented Lubrication  
& Stall Free Air Motor

Patented Long Life  
Diaphragm Design

Self-Cleaning Ball  
Valve Enclosure

Pass 5/16" / 8mm Solids



#### Red Series

FRASplas Body-  
Fire Retardant  
Antistatic  
Construction -  
Safe for Explosive  
Environments ATEX  
M1 Rating




#### Ebony Series

Noryl Body-  
Corrosive  
Resistant  
Internals- For  
Acids And Other  
Hazardous  
Liquids.

### Features / Benefits


- Patented long life diaphragm & self-cleaning valve
- Low air consumption
- True lube-free & stall-free air motor: less sensitive to abrasive particles in the air supply and no oil emissions in the exhaust air
- Low weight due to light weight plastic & aeronautical design approach. No need for metal pumps
- Anti-icing: not affected by moisture in air line
- Large solids handling
- High suction lift
- Longer lasting air motor due to unique design and modular components that eliminate the need to replace the entire motor when worn.
- Conductive plastic (FRASplas) pumps are safe for explosive environments. Rated and certified to ATEX M1
- Low noise level

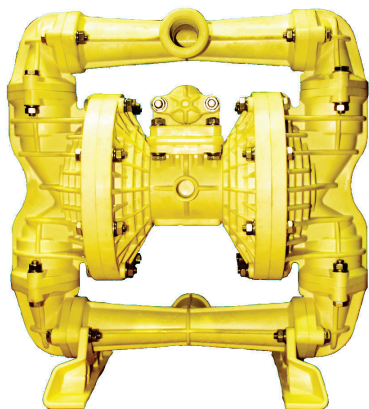

## Ball Valve

"Pumps 2000" air operated dual diaphragm pumps were specifically designed for harsh mining duties and are guaranteed to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. Suitable for pumping applications in all industries.

## Performance Curve

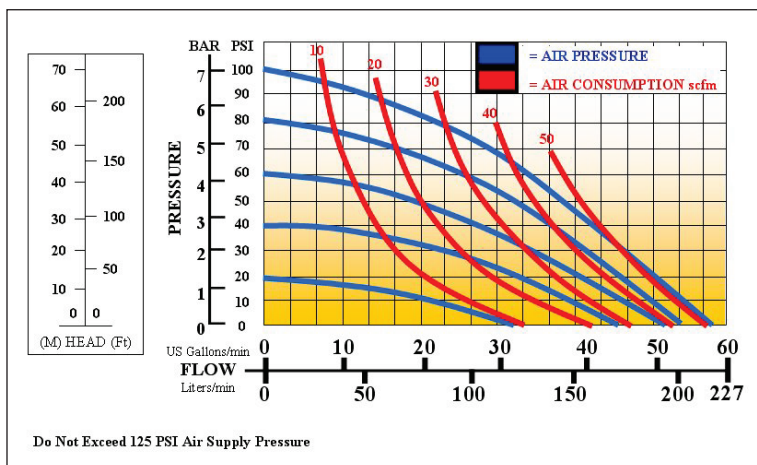

AIR PRESSURE: Tested at 100 psi (Not to exceed 125 psi)

FLOW RATE: 0-58 gpm / 220 lpm

FLUID CONNECTION: 1" (Internal Thread)

AIR INLET PORT: 1/2" (Internal Thread)

EXHAUST PORT: 3/4" (Internal Thread)

DELIVERY PRESSURE: Tested to 87 psi

SUCTION PRESSURE: Tested to 19' / 5.8m dry and 27' / 8m wet

PARTICLE SIZE: 5/16" / 8mm Spherical

PUMP WEIGHT: From 17 lbs / 7.7kg

Available from:

