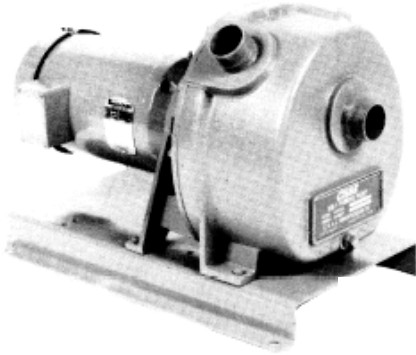
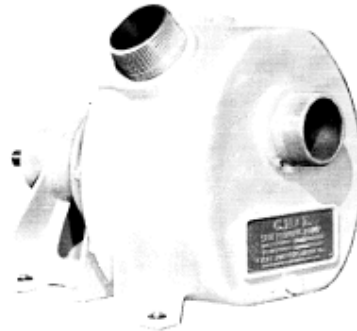


CH&E**4720E****4718P**

2" Self-Priming Centrifugal Pumps

Electric Powered and Without Power

Backed by CH&E Limited Warranty


Models and Specifications

Pump	4718P	4720E
Size	2" x 2" Female NPT	2" x 2" Female NPT
Construction	Aluminum	Aluminum
Shaft	CF 1144	N/A
Impeller	Cast Iron – 5 Vane – Passes 1/8" Spherical Solids	Cast Iron – 5 Vane – Passes 1/8" Spherical Solids
Volute	Class 30 Cast Iron	Class 30 Cast Iron
Seal	Single Grease Seal – Spring (SS) Loaded Carbon Ceramic Faces	Single Grease Seal – Spring (SS) Loaded Carbon Ceramic Faces
Cover	Aluminum	Aluminum
Gaskets	Cloth Reinforced Rubber	Cloth Reinforced Rubber
"O" Rings	N/A	Ethylene-Propylene
Bearings	2 Single Row Ball Bearings	N/A
Suction Elbow	Aluminum	Aluminum
Electric Motor	N/A	7.5 HP TEFC
Speed	N/A	3500 RPM
Phase	N/A	Three
Voltage	N/A	230/460
Shipping Weight	135 lbs.	200 lbs.
Notes	Pump is set up for a 7.5 HP Electric Motor.	N/A

CH&E

2" Self-Priming Centrifugal Pumps

CH&E

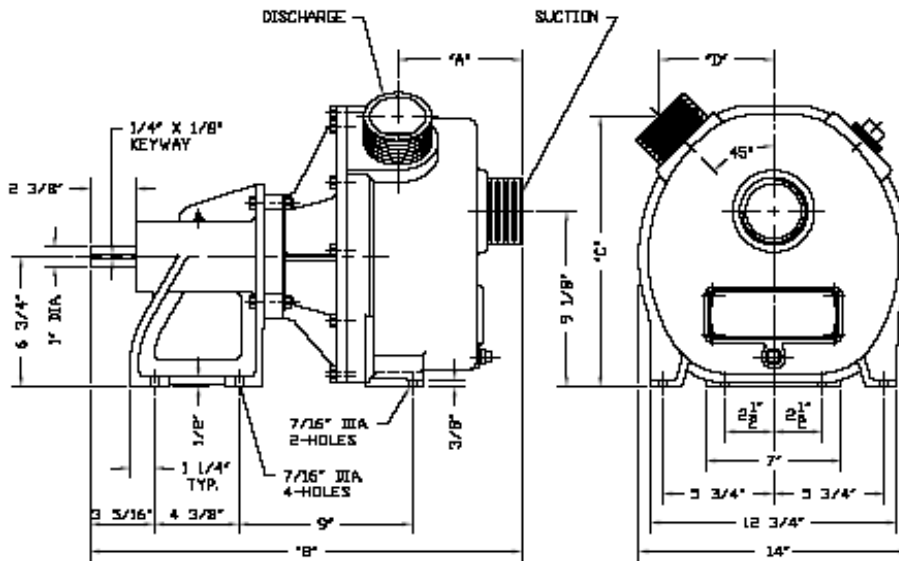

Power Requirements listed above are for electric power, however units may also be connected to gas or diesel engines.


Contact CH&E for specifications.

OPTIONAL EQUIPMENT

- Cast Iron Pump Case
- Motor Starter, mounted and wired
- Explosion-Proof Motor
- Wheel Kit with Handle

WARNING:

DO NOT USE IN EXPLOSIVE ATMOSPHERE OR FOR PUMPING VOLATILE FLAMMABLE LIQUIDS. CONTACT THE FACTORY FOR EXPLOSION-PROOF MODELS.

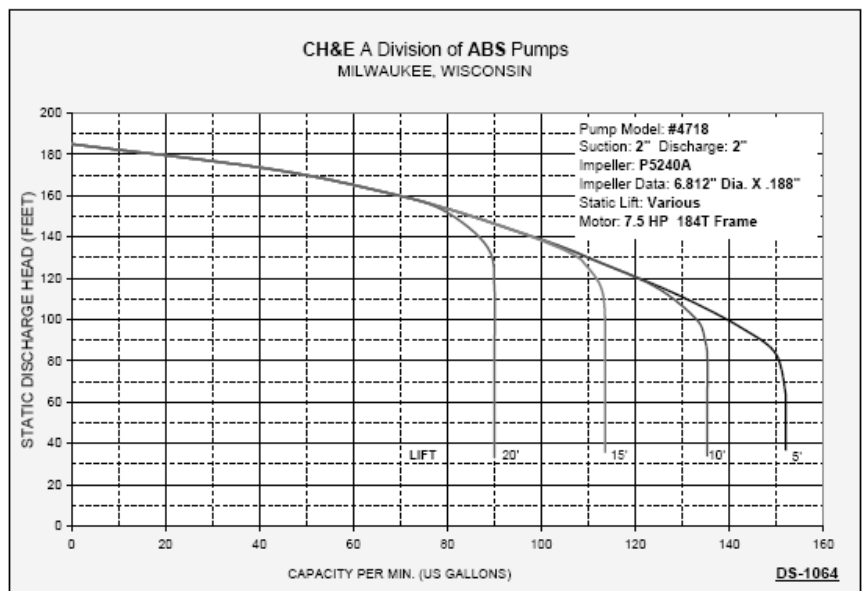

CH&E