

M PUMP 0.5" POLYPROPYLENE & KYNAR



CE

Pump Data

Max. Flow Rate	52 lpm
Max. Working Pressure	125 psi
Air Inlet Connection	1/4" NPT (F)
Fluid Connection	1/2" NPT (F)
Max. Lift Dry Limits	4.2 m
Max. Solid Sizes	2 mm
Temperature Limits	Determined by Elastomers



Typical Pump Design Code



Series	Pump Sizes	Wet Parts	Non Wet Parts	Diaphragm	Ball Valve	Valve Seat	Connections
MP: Clamp Design	0.25: 1/4" 0.5: 1/2" 1: 1"	A: Aluminium P: Polypropylene K: Kynar S: Stainless Steel	A: Aluminium G: GFPP <u>Optional</u> S: Stainless Steel	B: Buna-N E: EPDM H: Hytrel N: Neoprene T: PTFE U: Polyurethane V: Viton W: Santoprene	B: Buna-N E: EPDM H: Hytrel N: Neoprene T: PTFE U: Polyurethane V: Viton W: Santoprene	A: Aluminium B: Buna-N K: Kynar N: Neoprene P: Polypropylene S: Stainless Steel T: PTFE W: Santoprene	BSP: BSP Thread F: Flange NPT: NPT Thread
MB: Bolt design	1.5: 1.5" 2: 2" 3: 3"						

DATA SHEET

Performance

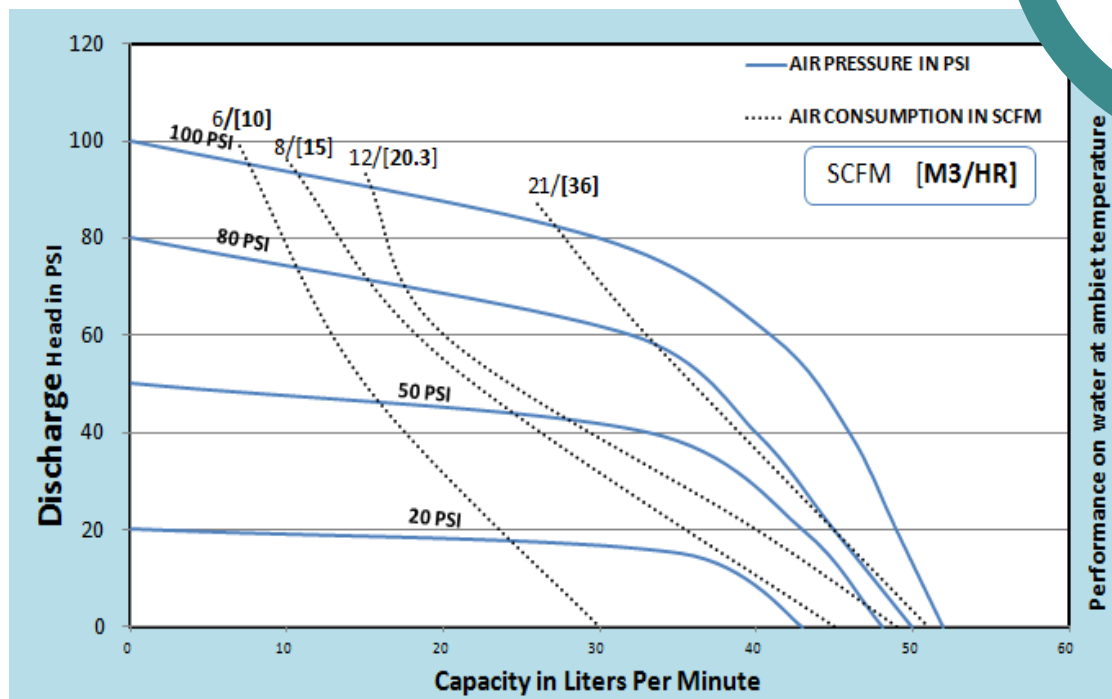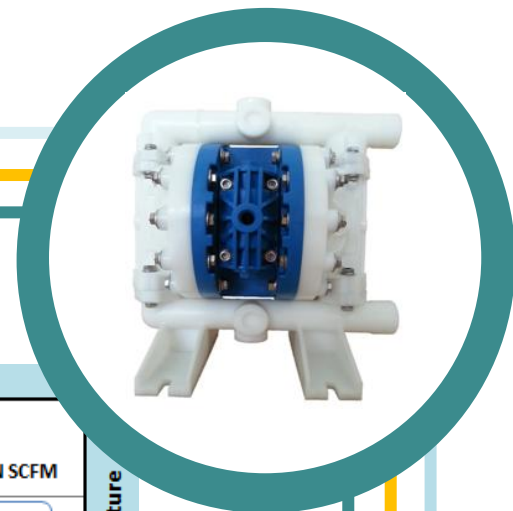

Dimension

