


M PUMP 1.5”
POLYPROPYLENE &
KYNAR

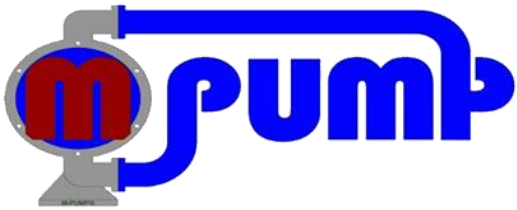

Pump Data


Max. Flow Rate	520 lpm
Max. Working Pressure	125 psi
Air Inlet Connection	3/4” NPT (F)
Fluid Connection	1.5” 150# ANSI/DIN Flange
Max. Lift Dry Limits	6 m
Max. Solid Sizes	6 mm
Temperature Limits	Determined by Elastomers

Typical Pump Design Code




Series	Pump Sizes	Wet Parts	Non Wet Parts	Diaphragm	Ball Valve	Valve Seat	Connections
MP: Clamp Design	0.25: ¼” 0.5: ½” 1: 1”	A: Aluminium P: Polypropylene K: Kynar S: Stainless Steel	A: Aluminium G: GFPP <u>Optional</u> S: Stainless Steel	B: Buna-N E: EPDM H: Hytrel N: Neoprene T: PTFE U: Polyurethane V: Viton W: Santoprene	B: Buna-N E: EPDM H: Hytrel N: Neoprene T: PTFE U: Polyurethane V: Viton W: Santoprene	A: Aluminium B: Buna-N K: Kynar N: Neoprene P: Polypropylene S: Stainless Steel T: PTFE W: Santoprene	BSP: BSP Thread F: Flange NPT: NPT Thread
MB: Bolt design	1.5: 1.5” 2: 2” 3: 3”						

DATA SHEET

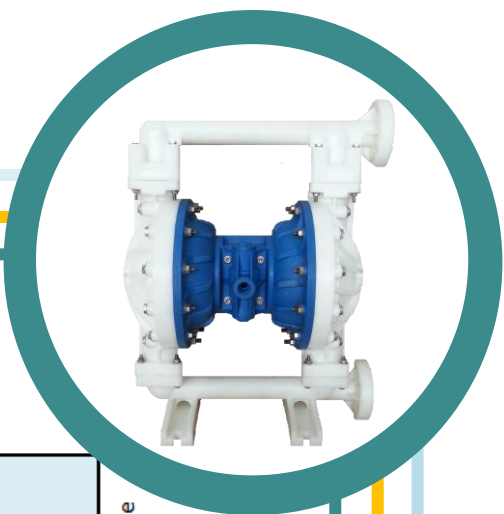

Performance

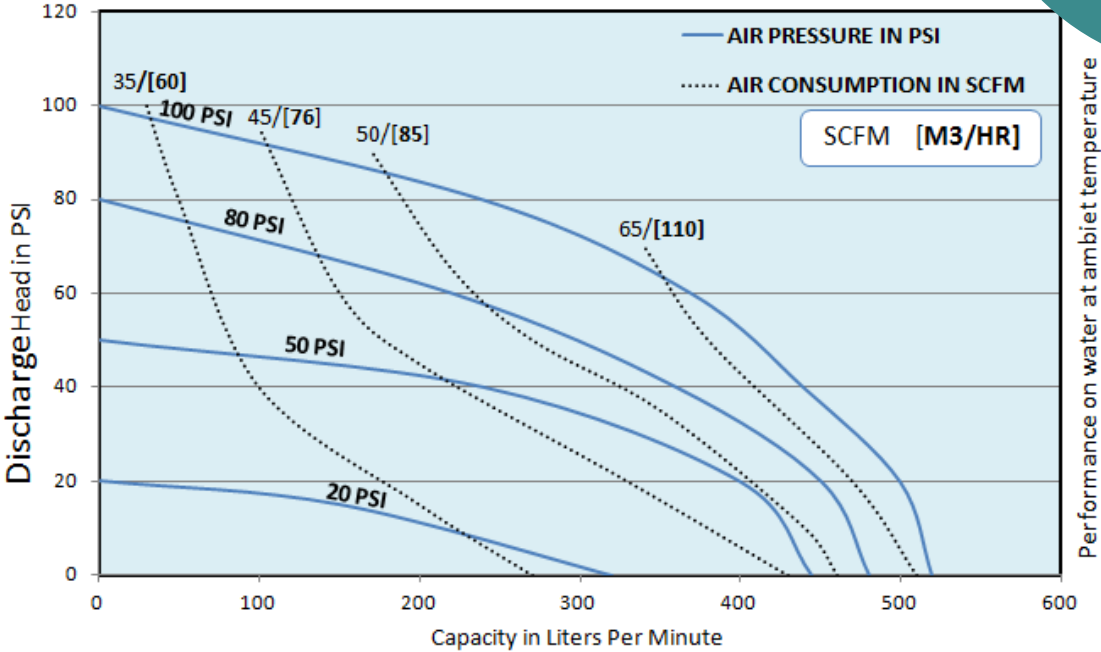

Dimension

