

M PUMP 2'' POLYPROPYLENE & KYNAR



CE

Pump Data

Max. Flow Rate	650 lpm
Max. Working Pressure	125 psi
Air Inlet Connection	3/4" NPT (F)
Fluid Connection	2" 150# ANSI/DIN Flange
Max. Lift Dry Limits	6 m
Max. Solid Sizes	6 mm
Temperature Limits	Determined by Elastomers


Typical Pump Design Code

MB
2
A
A
T
T
A
N

Series	Pump Sizes	Wet Parts	Non Wet Parts	Diaphragm	Ball Valve	Valve Seat	Connections
MP: Clamp Design	0.25: 1/4"	A: Aluminium	A: Aluminium	B: Buna-N	B: Buna-N	A: Aluminium	BSP: BSP Thread
	0.5: 1/2"	P: Polypropylene	G: GFPP	E: EPDM	E: EPDM	B: Buna-N	F: Flange
	1: 1"	K: Kynar		H: Hytrel	H: Hytrel	K: Kynar	NPT: NPT Thread
	1.5: 1.5"	S: Stainless Steel	<u>Optional</u>	N: Neoprene	N: Neoprene	N: Neoprene	
MB: Bolt design	2: 2"		S: Stainless Steel	T: PTFE	T: PTFE	P: Polypropylene	
	3: 3"			U: Polyurethane	U: Polyurethane	S: Stainless Steel	
				V: Viton	V: Viton	T: PTFE	
				W: Santoprene	W: Santoprene	W: Santoprene	

DATA SHEET

Performance

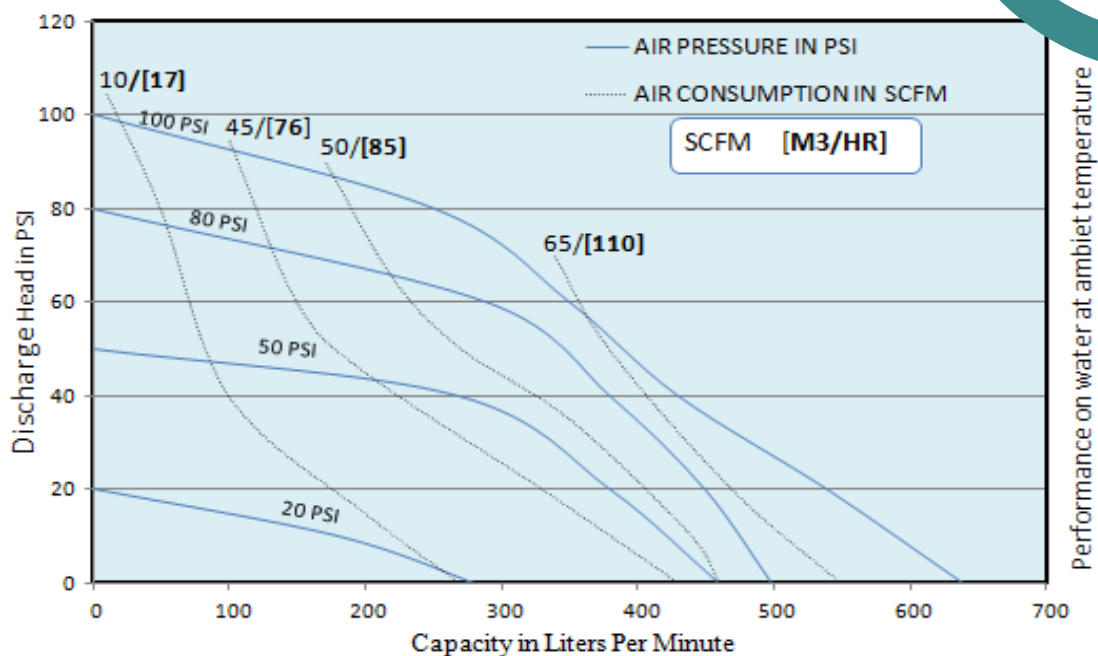

Dimension

