

BRONZE PEDESTAL ROTARY GEAR PUMPS

GEAR PUMPS SERIES N4000L



FEATURES

- Bronze corrosion resistant castings
- Special cast bronze helical gears for quiet operation
- Stainless steel shafts & fasteners
- Synthetic braided compression packing (with Polytetrafluoroethylene (PTFE) dispersion) is standard
- Optional lip seals are available
- Positive displacement flow
- Bronze bearing surfaces with grease fittings


DRIVE

Pumps should be mounted on a rigid base and properly aligned with the motor. Direct drive via flexible shaft coupling is the preferred method. When a belt drive is needed, additional support is necessary to absorb the added pulley load. This can be accomplished in one of two ways: 1) Use the standard pump arrangement by adding an independently supported jackshaft (see figure 2 below) or use kit 34P or 2) When space is an issue, use an optional "long shafted" pump and add a properly shimmed pillow block bearing (see figure 1).

LIQUIDS AND TEMPERATURE

Service life will be increased substantially if the liquid pumped is clean and has some degree of lubricity. These positive displacement pumps have tight tolerances. Fine abrasives like sand, silt, or powders in suspension will accelerate pump wear and reduce throughput. Liquids compatible with bronze and stainless steel can be pumped providing proper seal has been specified (see chemical compatibility or check factory). No carbon bearings used. When possible, flush the pump after each usage. Temperature extremes are detrimental to service life and should be avoided. Basic metals of construction allow a temperature range of -40 to 400oF. Some lip seal elastomers have a limit of 212oF. (See engineering data or check factory). Allowing a liquid to freeze in the pump can cause damage.


PERFORMANCE

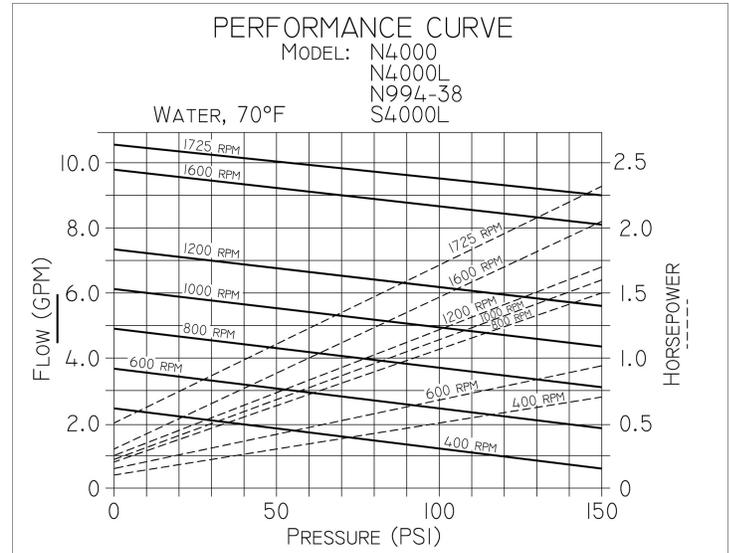

SUCTION LIFT

Close tolerances and the positive pumping action make the rotary gear pump capable of lifting water on the suction side as high as 20 feet. Though gear pumps are self priming, a foot valve is recommended. If possible, wet the gears with liquid to be pumped for the first dry start. Liquid retained in the system and gear chambers serves to “wet” the pump on subsequent starts.

EXPLODED VIEW AND PARTS LIST

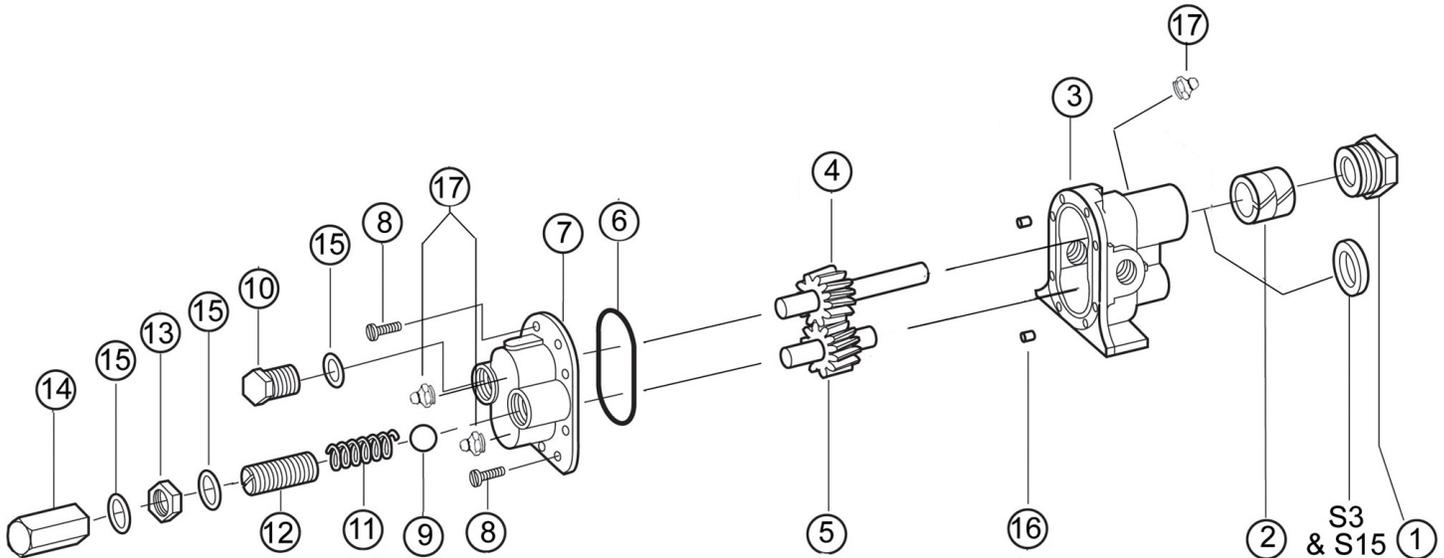


	1	2*	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	Packnut	Packing	Body	Drive Gear Assy	Idle Gear Assy	O-Ring	Cover	Screw	Ball	Plug Nut	Spring	Adj. Screw	Locknut	Bypass Nut	Fiber Washer	Dowel Pin	Grease Fitting	Tag	Stick Screw	Repair Kit
Pump No.	1 Req'd	2 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	8 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	3 Req'd	2 Req'd	2 Req'd	1 Req'd	2 Req'd	
N4000L	1762	5479	9319PD1N-1	33007	33008	9797-041	9322PN5N-1	5385	-	-	-	-	-	-	-	8885	5390	9344	9345	12213
N4000LR	1762	5479	9319PD1N-1	33007	33008	9797-041	9323PN5B-1	5385	5206	5205	5207	5200	5209	5204	6964	8885	Qty. 3.00 5390	9344	9345	12213


Repair Kits contain items 2, 4, 5 and 6.

Items 18 and 19 not shown above.

DIMENSIONS N4000LR, N4000LRS3 & N4000LRS15

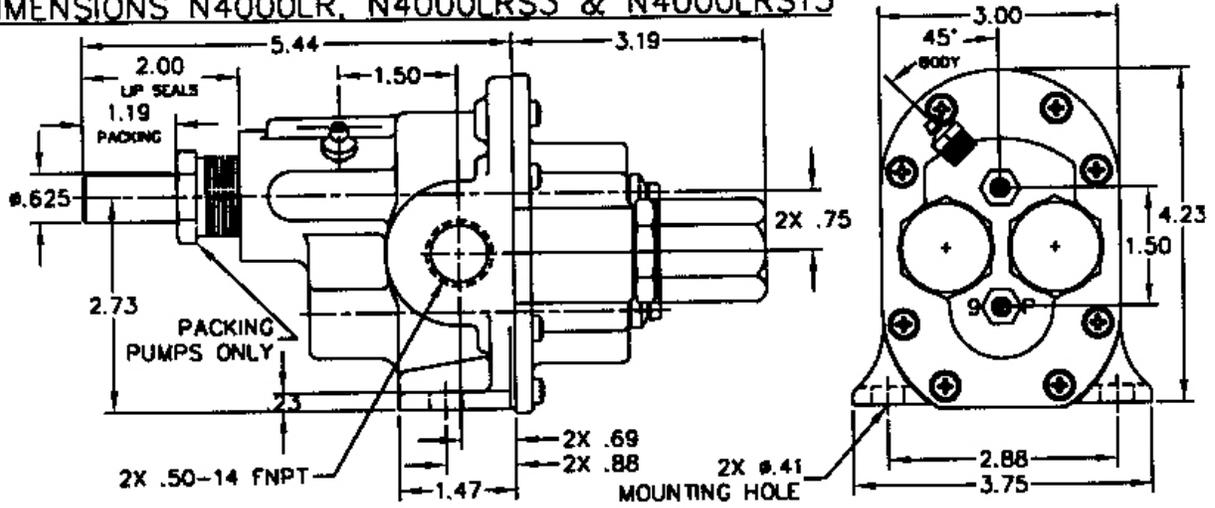


DIMENSIONS N4000L, N4000LS3 & N4000LS15

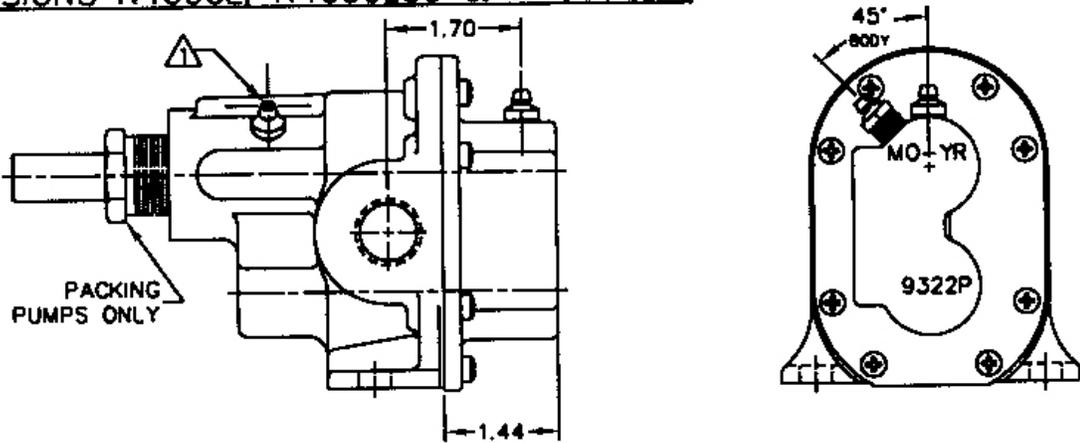


▲ GREASE FITTINGS (ITEM 17) INSTALLED INTO .125-27 NPT CONNECTIONS.

DIMENSIONS N4000RL, N4000RLS3 & N4000RLS15

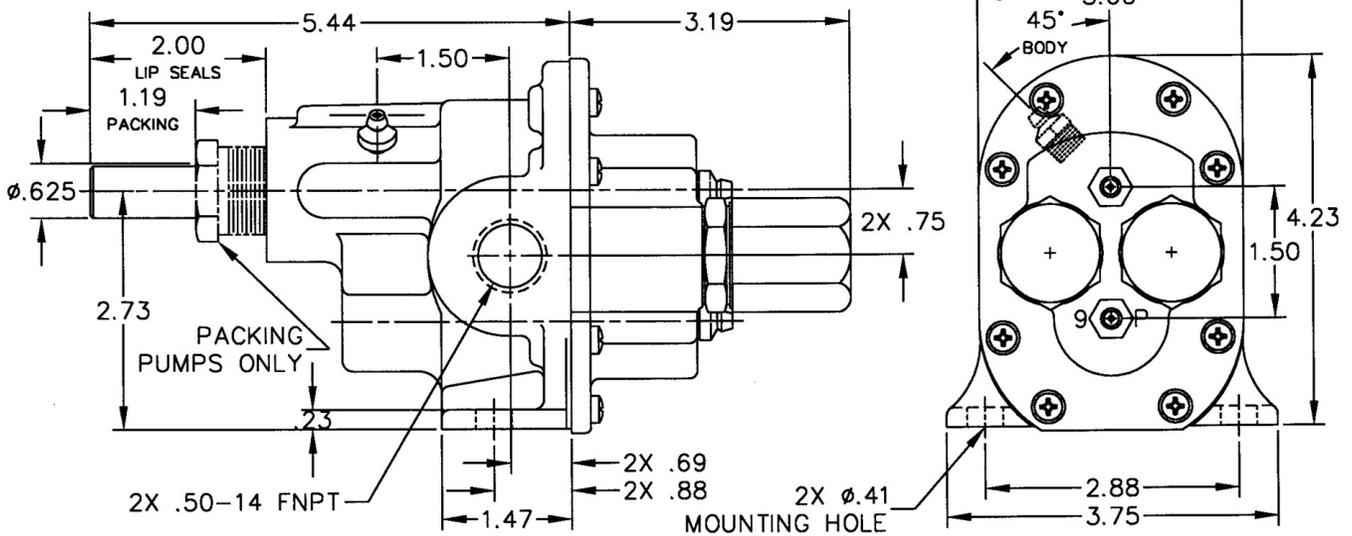



DIMENSIONS N4000L, N4000LS3 & N4000LS15

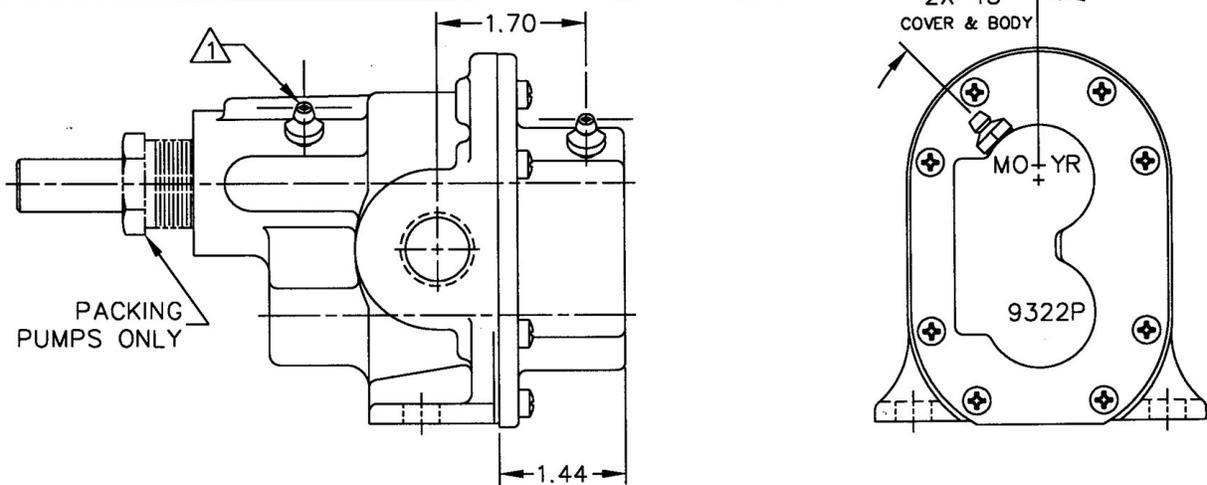


⚠ GREASE FITTINGS (ITEM 17) INSTALLED INTO .125-27 NPT CONNECTIONS.

DIMENSIONS N4000LR, N4000LRS3 & N4000LRS15

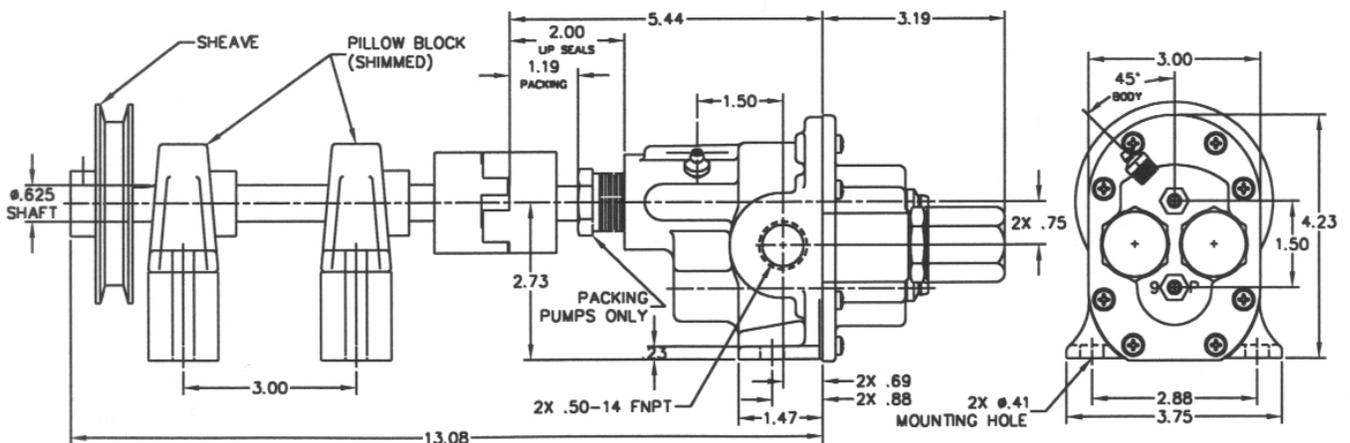

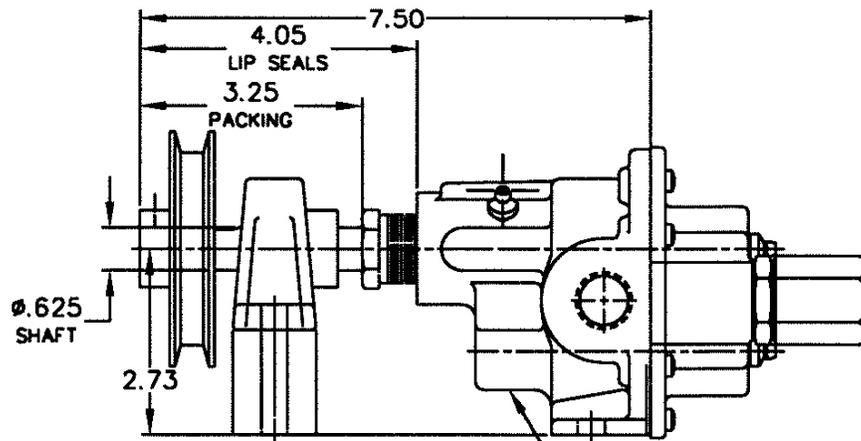

OPTIONAL N4000L(R)-02
SERIES PUMP
(LONG DRIVE SHAFT)
FIGURE 1

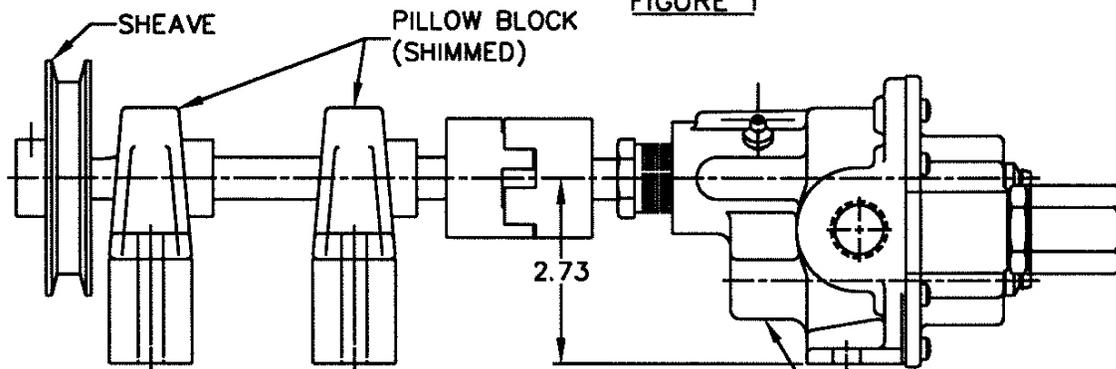

STANDARD N4000L(R)
SERIES PUMP
FIGURE 2

BY-PASS AND ROTATION

The pump by-pass is not intended to be a metering or flow control device. Its main purpose is to function as a pressure relief when the desired set point is exceeded, overheating can occur within 5 -10 minutes if the discharge line is completely shut off for extended periods. Reversing rotation reverses the "IN" and "OUT" ports and the location of the by-pass ports have to be reversed. The by-pass valve is factory set at 50 p.s.i. To increase the setpoint, turn the by-pass valve adjusting screw in a clockwise direction.