


BRONZE CLOSE COUPLED ROTARY GEAR PUMPS

GEAR PUMPS SERIES N992 SERIES D.C.



FEATURES

- Compact Design Eases Installation & Use in Limited Space Areas.
- Construction is Bronze & Stainless Steel Wetted Components.
- Close Tolerance Design Allows For Consistent Performance.
- Self-Lubricating Bearings
- Complete Units Available
- Slotted Motor Base
- Permanent Magnet Rigid Base Motors

LIQUIDS AND TEMPERATURE

Compact DC portable units convenient for on site servicing of vehicles, machinery and field equipment. For pumping oil direct from crankcase or oil reservoir, drums, containers, transfer diesel fuel to vehicles, pumping other liquids and chemicals compatible with materials of construction. Pumping viscous oils, SAE 30 or greater, can overload motor. Intermittent use is recommended when pumping viscous oils, especially in cold weather.


Service life will be increased substantially if liquid pumped is clean and has lubricity value. These pumps have extremely close tolerances. Fine abrasives like sand, silt or powders in suspension will destroy pumping ability.

Liquids compatible with bronze, stainless steel and the Nitrile lip seal can be pumped. For solvents a fluoroelastomer lip seal is available. For a fluoroelastomer Seal, add S5 to the pump model number. See chemical compatibility table. Temperature extremes are detrimental to service life and should be avoided. Basic metals of construction allow temperature range of -40° to 400°F. Standard Nitrile lip seal has a temperature limit of 250°F, while the fluoroelastomer lip seal will handle up to 300°F. Freezing liquid in the pump can deform or damage the pump.

SUCTION LIFT

As a general rule, the suction lift should be kept at an absolute minimum by placing the pump as close to the liquid source as possible. A gear pump in new condition can lift 20 feet of water in the suction line. A foot valve (preferably with built-in strainer) is recommended at the beginning of the suction line. For a first start-up, the pump should be primed to avoid dry running. Minimum size of the suction pipe is the size of the pump inlet port. For longer suction lines (over 3 feet) or for viscous liquids, the pipe should be at least one size or two sizes larger than the pump inlet port.

EXPLODED VIEW AND PARTS LIST

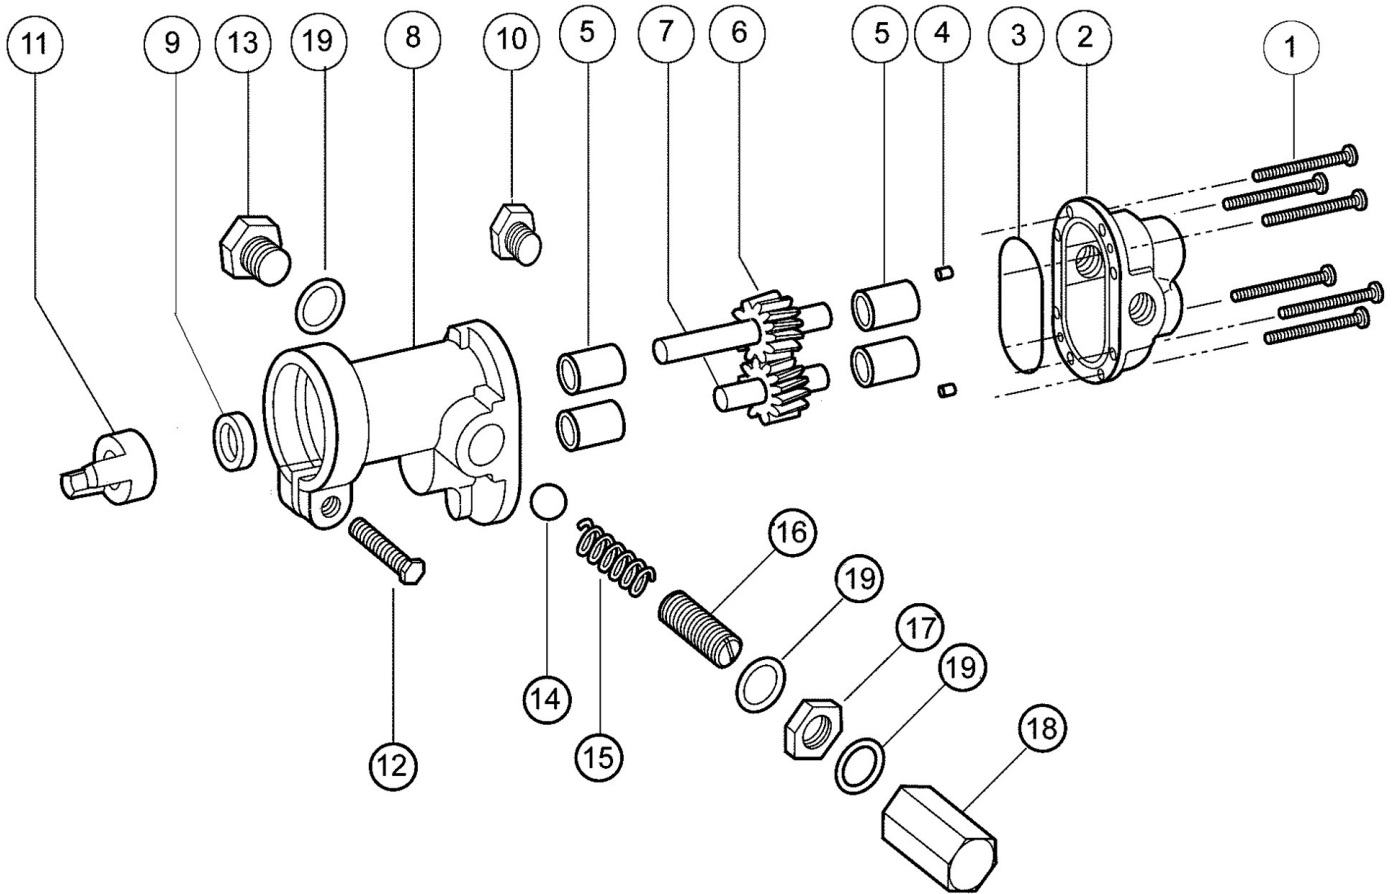

Pump No.	1	2	3 ¹	4	5 ¹	6 ¹	7 ¹	8	9 ^{1,2}	10	11	12	13	14	15	16	17	18	19
	Screw	Body	O-Ring	Dowel Pin	Bearing	Drive Gear Assy.	Idle Gear Assy.	Cover	Lip Seal	Cap Plug	Coupling	Screw	Plug Nut	Ball	Spring	Adj. Screw	Locknut	Bypass Nut	Fiber Washer
	6 Req'd	1 Req'd	1 Req'd	2 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	1 Req'd	3 Req'd
N992	5013	9306NC5N	9797-038	8885	5024	32994	32993	9308NN2N	5007	9346	5604	5595	---	---	---	---	---	---	---
N992R	5013	9306NC5N	9797-038	8885	5024	32994	32993	9308NN3B	5007	9346	5604	5595	1838	5238	1840	5237	5240	5239	6533

¹ Repair Kits contain items 3, 5, 6, 7 & 9. Repair Kit for N992(R) is #10631.





² Seal #5007 is standard Buna N, #7580 is Viton(R)*-Teflon(R)*.

Product Number				20	21	22	23	26	27
				Spider	Coupling Half	Bracket/ Adapter	Screw	Motor	Adapter Kit
				1 Req'd	1 Req'd	1 Req'd	4 Req'd	1 Req'd	1 Req'd
N992(R)	Q	-	J76	7839	7643	8335	5411	8563	11331
N992(R)	Q	-	J75	7839	7643	8335	5411	8562	11331
N992(R)	Q	-	F93	7839	7643	8335	5411	3073	11331
N992(R)	Q	-	C74	7839	7643	8335	5411	2924	11331
N992(R)	-	-	C81	7839	7643	7602	5916	8295	12144
N992(R)	-	-	C82	7839	7643	7602	5916	8295	12144

	NO.14	NO.12	NO.10	NO.8
12 VOLT DC	11 FT.	18 FT.	28 FT.	45 FT.
24 VOLT DC	20 FT.	34 FT.	55 FT.	87 FT.
32 VOLT DC	35 FT.	56 FT.	91 FT.	144 FT.

DIMENSIONS

N992(R)Q-J75 & N992(R)Q-J76

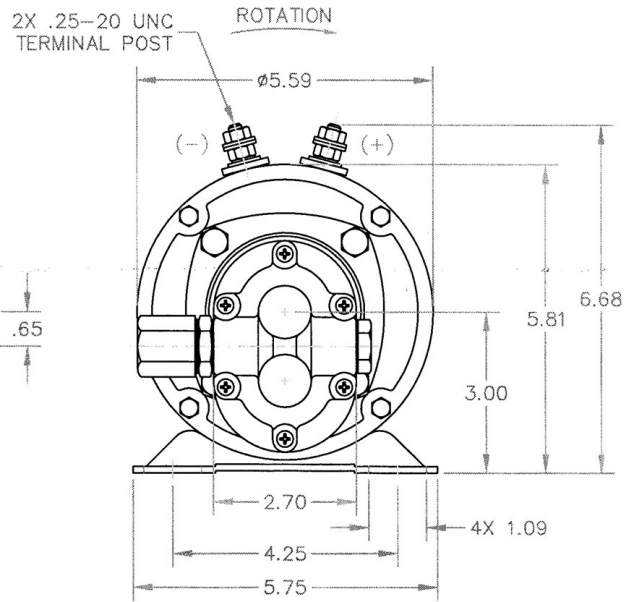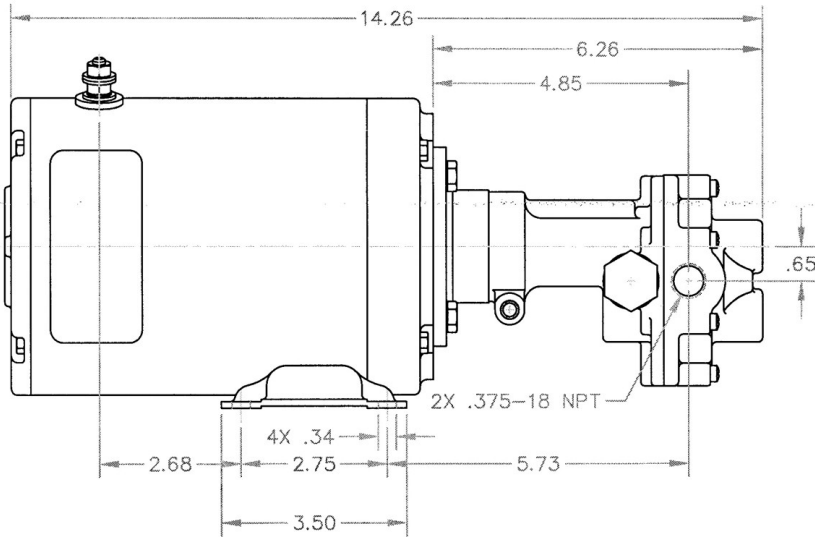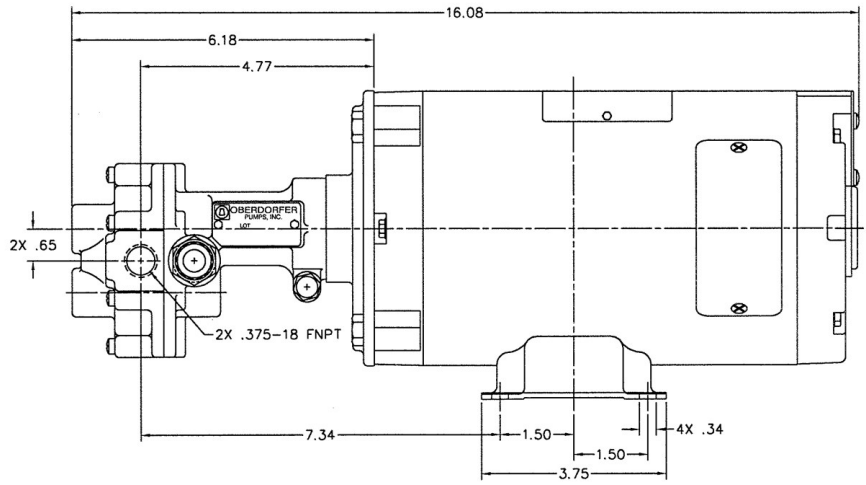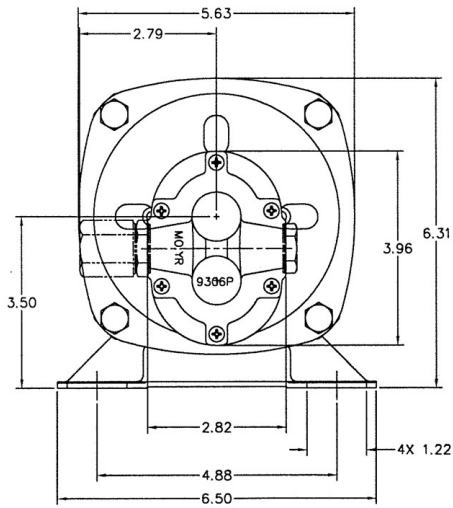

ROTATION AND RELIEF VALVE

If the discharge line contains any throttling devices such as a shut-off valve, a spray nozzle or other restrictive device, it is necessary to have a relief valve in the system, which returns the liquid to the suction side or to the tank. The relief valve is also available as part of the pump itself (R-model pumps). However, built-in relief valves are only good for intermittent service. If used continuously, the pump will overheat. A built-in relief valve is strictly a safety device against overpressure. It will not work successfully as a pressure or flow control device. For this purpose a separate relief valve in the pressure line must be used. Unless otherwise specified, the pump motor unit is supplied by the factory for shaft rotation counterclockwise from shaft end. Reversing motor will reverse "in and "out" ports and also requires changing relief valve location. The relief valve is always on the inlet side of this pump series. The factory pressure setting is 50 PSIG. To increase pressure, turn the relief valve adjusting screw in a clockwise direction.