



# Butterfly Valves

**1-1/2" to 12" • Bodies – PVC, Corzan® CPVC, PPL  
Disks – PVC, Corzan® CPVC, PPL, PVDF**



### **A Better Butterfly Valve**

Hayward 1-1/2" through 12" all-Plastic Butterfly Valves are rated at a full 150 psi. Unlike other plastic butterfly valves, Hayward valves are constructed from a one piece body that incorporates fully supported flanged bolt holes to prevent stressing of the mating pipe flanges. Their heavy duty construction stands up to the most demanding applications. The rock solid integral mounting pad insures that the valve operator will function reliably – whichever operator is used, lever handle, gear box or actuator.

### **Extra Features, No Extra Cost**

Hayward Butterfly Valves feature a blowout-proof stainless steel stem and a unique, full body liner that has a V-notch retention design. This assures positive sealing of the liner to the valve body. An integrally molded face seal provides positive sealing against the mating flange without the need for additional gaskets. The lever handle has a built in lockout feature and every Hayward valve is ready for actuation.

### **Better Sealing**

Other plastic butterfly valves have only a thin o-ring on the disk to seal the valve, but Hayward valves feature a full body liner seal. This means that the process media never contacts the valve body. And you can count on the full liner seal to perform reliably, year after year.

### **Easy Retrofit**

Hayward Butterfly Valves can be easily fitted into a metal piping system. All valve sizes meet industry face-to-face standards – allowing simple retrofit.

### **No Metal, No Corrosion**

These valves have no metal in contact with the process media. They cannot corrode or rust – nor will they contaminate sensitive fluids flowing through them.

### **Features**


- Rated at 150 PSI
- Stainless Steel Shaft
- Fully Supported Flange Bolt Holes
- Full Body, V-Notch Liner
- Blowout-Proof Shaft
- Viton, EPDM or Nitrile Liners
- Wafer Body Design

### **Options**

- Stem Extensions
- Lug Body Design
- Gear Operators
- Electric Actuators
- Pneumatic Actuators
- Titanium Shaft
- 2" Square Operating Nut
- PVDF Discs
- Actuator Mounts

Corzan® CPVC is a trademark of Noveon, Inc.

# Technical Information

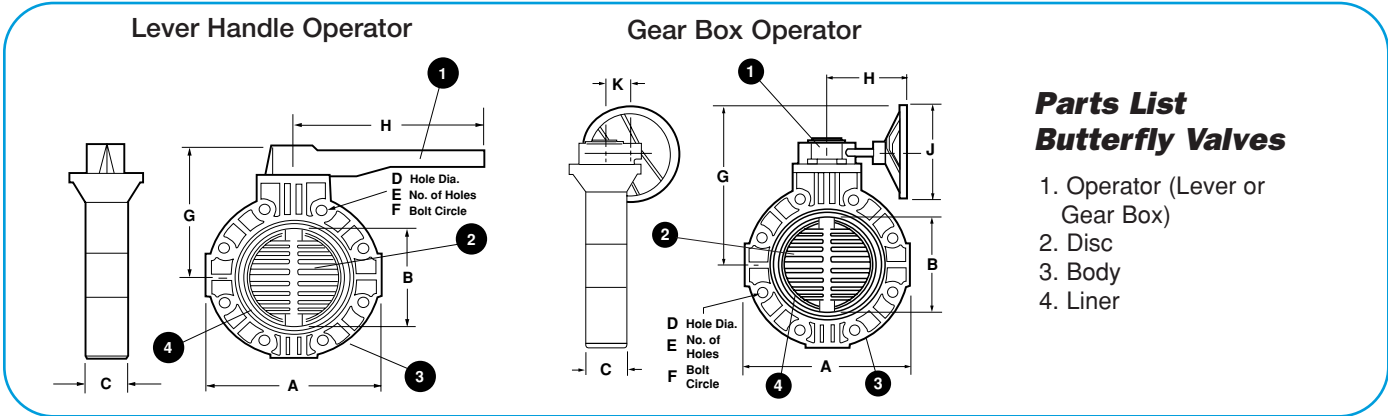

## Dimensions - Inches / Millimeters

Size	A	B	C	D	E	F	G		H		J	K	Wt. Lb / Kg
							Gear Box	Lever	Gear Box	Lever			
1-1/2 / 50	6.00 / 152	1.75 / 44	1.50 / 38	.63 / 16	4	3.88 / 99	9.31 / 236	6.25 / 159	7.13 / 181	10.50 / 267	8.00 / 203	1.88 / 48	10.5 / 4.8
2 / 63	6.00 / 152	1.75 / 44	1.50 / 38	.75 / 19	4	4.75 / 121	9.31 / 236	6.25 / 159	7.13 / 181	10.50 / 267	8.00 / 203	1.88 / 48	10.5 / 4.8
3 / 90	7.75 / 197	3.13 / 80	2.00 / 51	.75 / 19	4	6.00 / 152	9.75 / 248	6.69 / 170	7.13 / 181	10.50 / 267	8.00 / 203	1.88 / 48	11.6 / 5.3
4 / 110	9.25 / 235	3.94 / 100	2.19 / 56	.75 / 19	8	7.50 / 191	10.19 / 259	7.94 / 202	7.13 / 181	12.00 / 305	8.00 / 203	1.88 / 48	14.3 / 6.5
6 / 160	11.25 / 286	5.81 / 148	2.31 / 59	.88 / 22	8	9.50 / 241	12.38 / 314	9.50 / 241	7.13 / 181	14.00 / 356	8.00 / 203	1.88 / 48	15.4 / 7.0
8 / 225	13.75 / 349	7.75 / 197	2.50 / 64	.88 / 22	8	11.75 / 298	13.50 / 343	10.63 / 270	7.13 / 181	16.00 / 406	8.00 / 203	1.88 / 48	23.5 / 10.7
10 / 280	16.00 / 406	9.76 / 248	3.00 / 76	1.00 / 25	12	14.25 / 362	16.00 / 406	N/A	8.09 / 205	N/A	8.00 / 203	2.36 / 59	39.0 / 17.7
12 / 315	19.00 / 483	11.50 / 292	3.18 / 81	1.00 / 25	12	17.00 / 432	17.50 / 445	N/A	8.09 / 205	N/A	8.00 / 203	2.36 / 59	51.0 / 23.1

DIN metric flanges available

## Cv Factors


Size	Factor	Size	Factor
1-1/2"	90	6"	1100
2"	125	8"	2500
3"	280	10"	4700
4"	675	12"	7100

### Pressure Loss Calculation Formula

$$\Delta P = \left[ \frac{Q}{Cv} \right]^2$$

ΔP = Pressure Drop  
Q = Flow in GPM  
Cv = Flow Coefficient

## Operating Temperature/Pressure

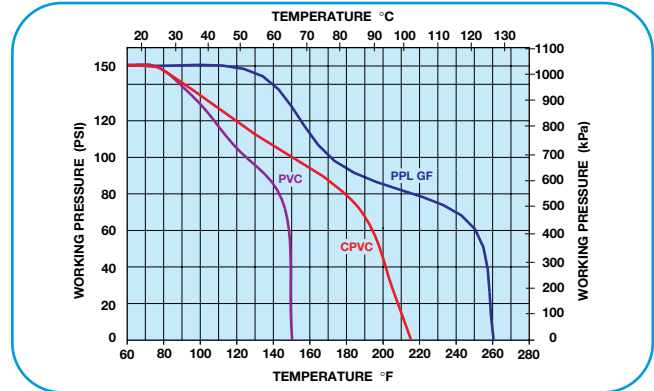

## Selection Chart

Size	Body Material	Disc Material	Shaft Material	Liner	Operator	Pressure Rating
*1-1/2" to 8"	CPVC	CPVC	316 SSSL	FPM, EPDM or Nitrile	Lever or Gear Box	150 PSI @70F Non-Shock
1-1/2" to 8"	PVC	PVC, PPL, or PVDF				
1-1/2" to 12"	PPL	PPL				

\* CPVC/CPVC 8" gear operated only

**HAYWARD**



Hayward Industrial Products, Inc.

One Hayward Industrial Drive, Clemmons, NC 27012  
Tel: 1-888-429-4635 (1-888-HAYINDL) • Fax: 1-888-778-8410  
E-mail: hflow@haywardnet.com  
Web Site: <http://www.haywardindustrial.com>