


HS-250

Heavy Service Retractable Injection Quill 2-1/2" Valve x 2" Tube



SPECIFICATIONS

SAFETY RATING	250 PSI
CHECK VALVE	OPTIONAL
SAF-T-SEAL TIP	N/A
QUICK DISCONNECT	N/A
VALVE/PROCESS CONNECTION SIZE	2-1/2"
INLET CONNECTION SIZE	2"
SOLUTION TUBE SIZE	2"
SOLUTION TUBE ID	2.067"
SOLUTION TUBE OD	2.375"
(A) OPERATING LENGTH	18.5"
(B) VALVE/GLAND LENGTH	14"
EXTRACTION LENGTH	32.5" + INSERTION LENGTH

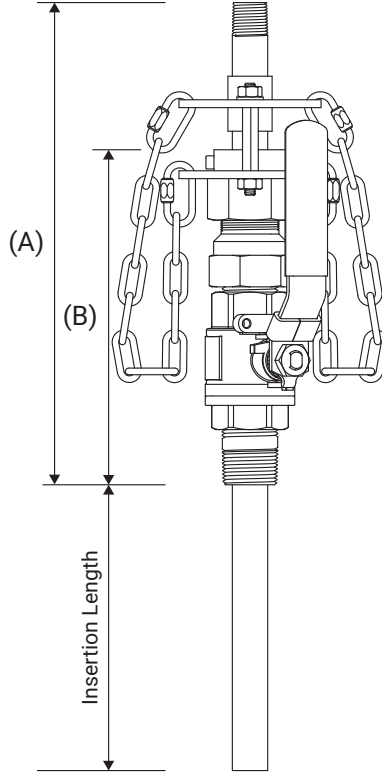

ORDERING OPTIONS

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
HS-250	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	S = Stainless Steel	A = ALLOY 20 H = HASTELLOY® C276 S = 316SS T = Titanium Gr.2	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel DH = Diffuser Holes	00 = No Check Valve 05 = Alloy, FKM 06 = Alloy, EPDM

TECH NOTES

- When selecting alloy check valves options, the body material of the check valve is the same as the solution tube material.
- Diffuser hole configurations to be determined by customer. SAF-T-FLO does not provide recommendations regarding diffuser hole layouts.
- The HS-250 series encompasses ordering options previously offered under the EB-153 series.